




Full Automatic Inline wrapping machine Model : DT1800FZ-PL/B-L

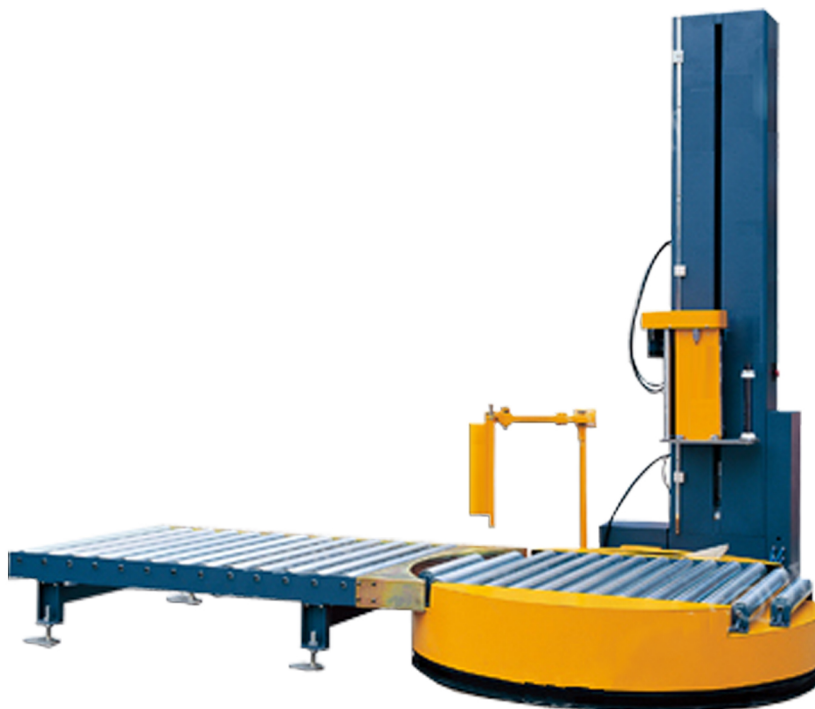

▶ Packaging process :

- ☐ The finished products by the pallet conveying line into the automatic wrapping machine station, automatic winding round packing machine, the set packing parameters after packaging, automatic film breaking film, automatically transported to the following transportation line;
- ☐ Automatic film coating, automatic film breaking and automatic welding of film tail.

▶ Main performance :

Control system

- ☐ PLC Programmable control, Wrapping top and bottom number of layers, times can be set;
- ☐ Photoelectric switch, automatic sensing of freight height;
- ☐ With automatic fault diagnosis, alarm, inquiry processing and emergency parking function;
- ☐ Manually reinforce the winding function for special protection of a part;
- ☐ Turntable positioning accuracy, turntable variable frequency speed regulation;



Full Automatic Inline wrapping machine Model : DT1800FZ-PL/B-L

▶ The film frame system :

- ☐ The film frame Pre-stretching up to 350%;
- ☐ Film frame up-down speed, The film feeding speed is adjustable respectively;
- ☐ Motor stretch film carriage, frequency converter to adjust tensile force of stretch film.

▶ Packing material :

- ☐ packing material : LLDPE Stretched film
- ☐ Film width : 500mm
- ☐ Film thickness : 20-35mm
- ☐ Max O.D : 260mm
- ☐ I.D : 76mm
- ☐ Length : 500mm

▶ Turntable drive :

- ☐ Drive mode; motor drive, Slewing bearing
- ☐ Turntable frequency conversion speed regulation : 0~15rpm Adjustable;
- ☐ Turntable induction motor : frequency control

▶ Main technical parameters :

Packing specification (L x W)	(800-1400) x (800-1400) mm
Packing specification (Height)	2400 mm
Weight	2000 kg (max)
Packaging efficiency	30~50 pallet/hour
Turntable diameter	2000 mm
Turntable speed	15rpm (Adjustable)
Transmission line speed	12 m/min
Turntable height	300 mm
Power	2.5 KW/380V/50HZ